


7MF 250, 50Hz

ISO 9906 Annexure A

Performance Curves

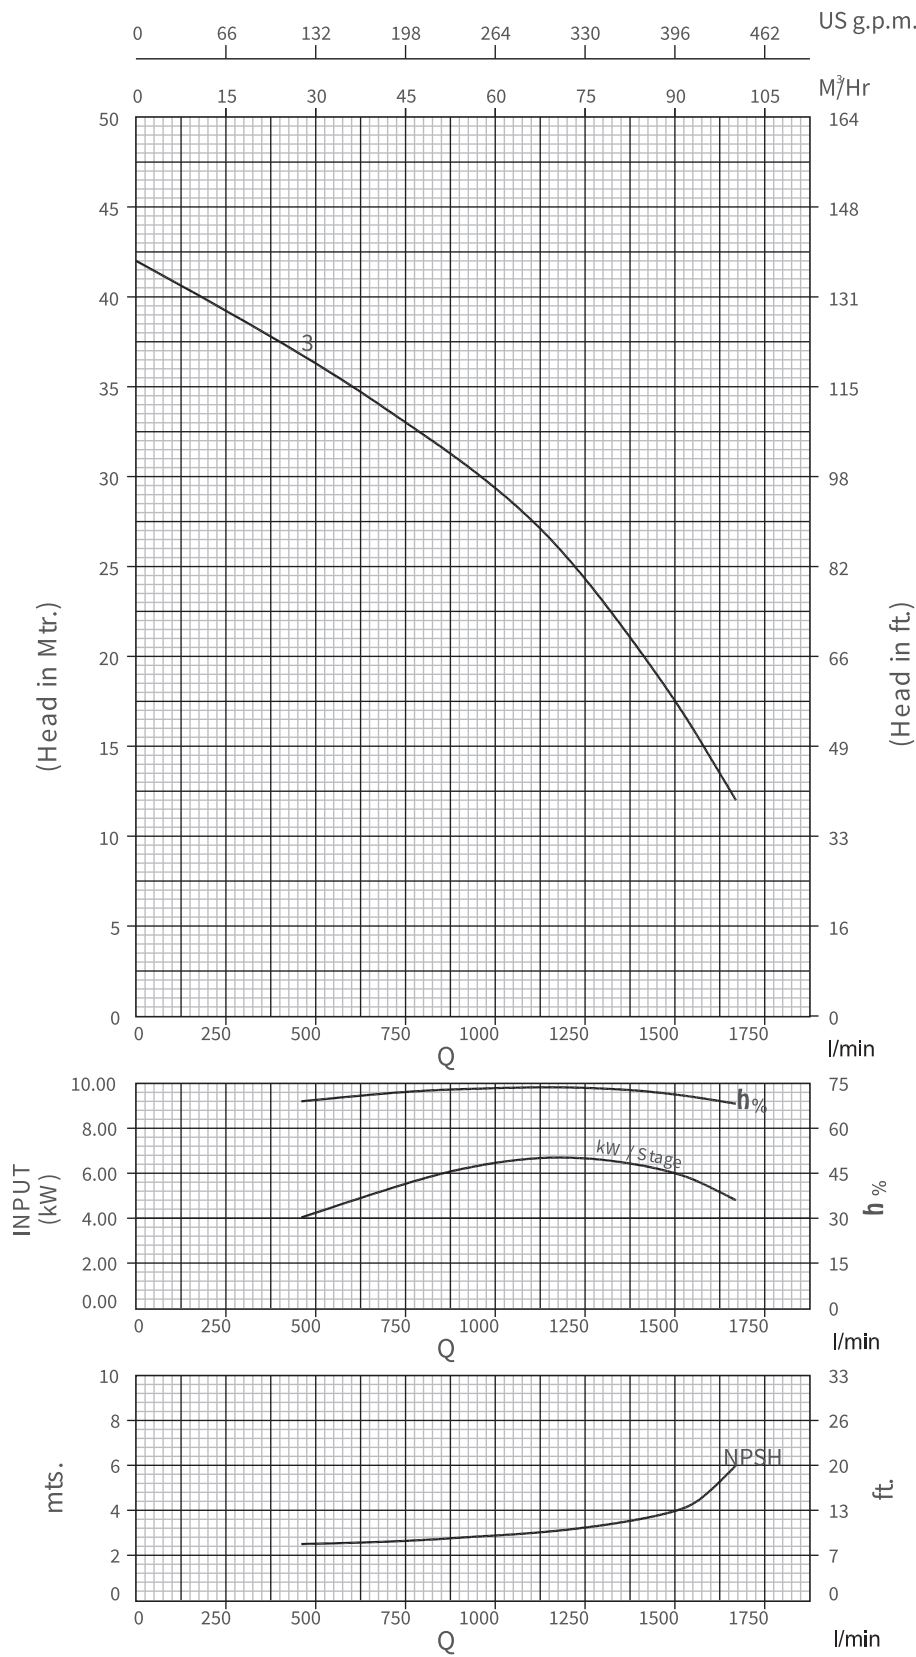


7MF 250, 50Hz

ISO 9906 Annexure A

Performance Chart

Model Name		Rating			Discharge									
Three Phase	Stage	kW	HP	l/min	0	460	750	900	1150	1380	1520	1580	1670	
				m³/h	0	27.6	45.0	54.0	69.0	82.8	91.2	94.8	100.2	
7MF 250-03	3	7.50	10.00	42.0 m³/h	42	37	33	31	27	21	17	15	12	

Dimensions & Weights

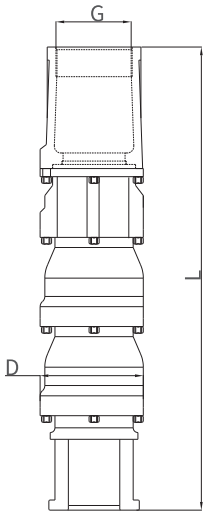


Model name	Specification			
	D	L	Weight (kg)	Weight (incl.pkg kg)
7MF-250A/03	160	818	62.5	70.5

*G:Available Outlet Size 3" & 4"
*D:With Cable Guard

7MF 350, 50Hz
ISO 9906 Annexure A

Performance Curves

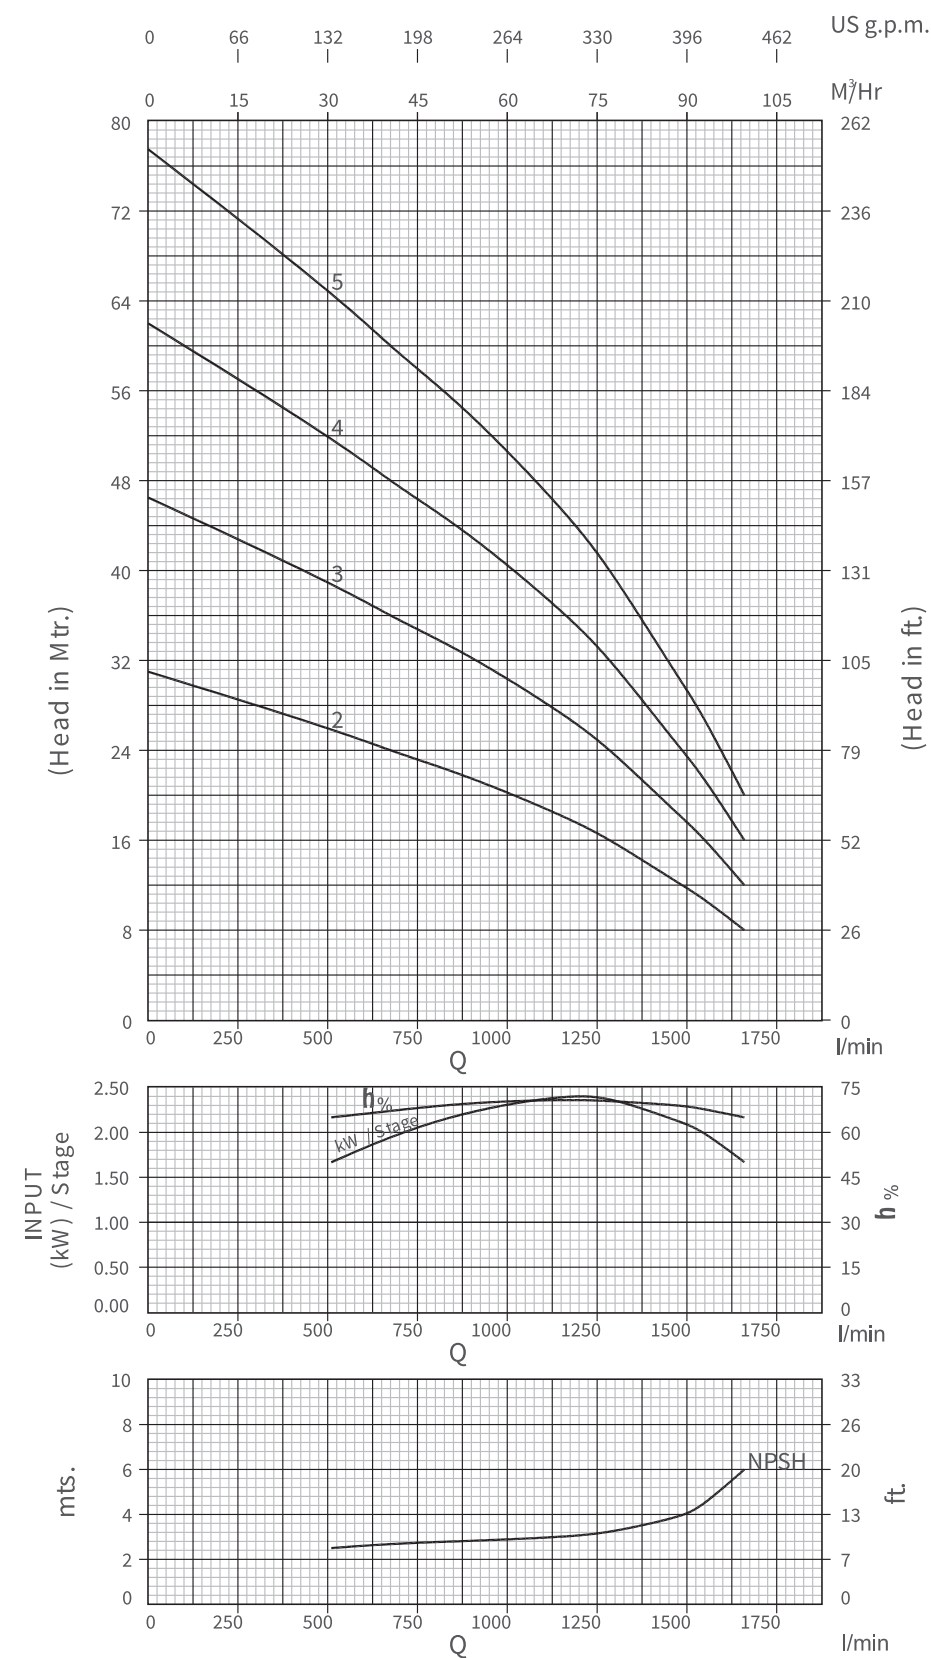


7MF 350, 50Hz
ISO 9906 Annexure A

Performance Chart

Model Name	Stage	Rating		Discharge									
		kW	HP	l/min m ³ /h	0	510	665	870	1170	1290	1485	1540	1660
Three Phase	Stage				0	30.6	39.9	52.2	70.2	77.4	89.1	92.4	99.6

7MF 350-02	2	5.50	7.50	HEAD IN Mtrs.	31	26	24	22	18	16	12	11	8
7MF 350-03	3	9.30	12.50		46	39	36	33	27	24	18	16	12
7MF 350-04	4	11.00	15.00		62	52	48	44	36	32	24	22	16
7MF 350-05	5	15.00	20.00		78	65	60	55	45	40	30	28	20

Dimensions & Weights

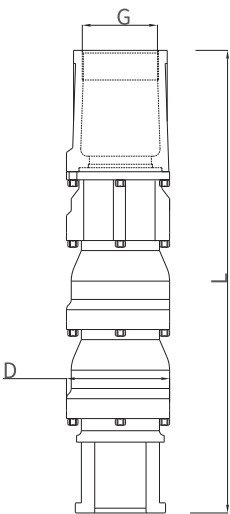


Model name	Specification			
	D	L	Weight (kg)	Weight (incl.pkg kg)
7MF-350A/02	160	686	51.5	59.5
7MF-350A/03	160	818	62.5	70.5
7MF-350A/04	160	950	73.5	81.5
7MF-350A/05	160	1082	84.5	92.5

*G:Available Outlet Size 3" & 4"
*D:With Cable Guard

7MF 500, 50Hz
ISO 9906 Annexure A

Performance Curves

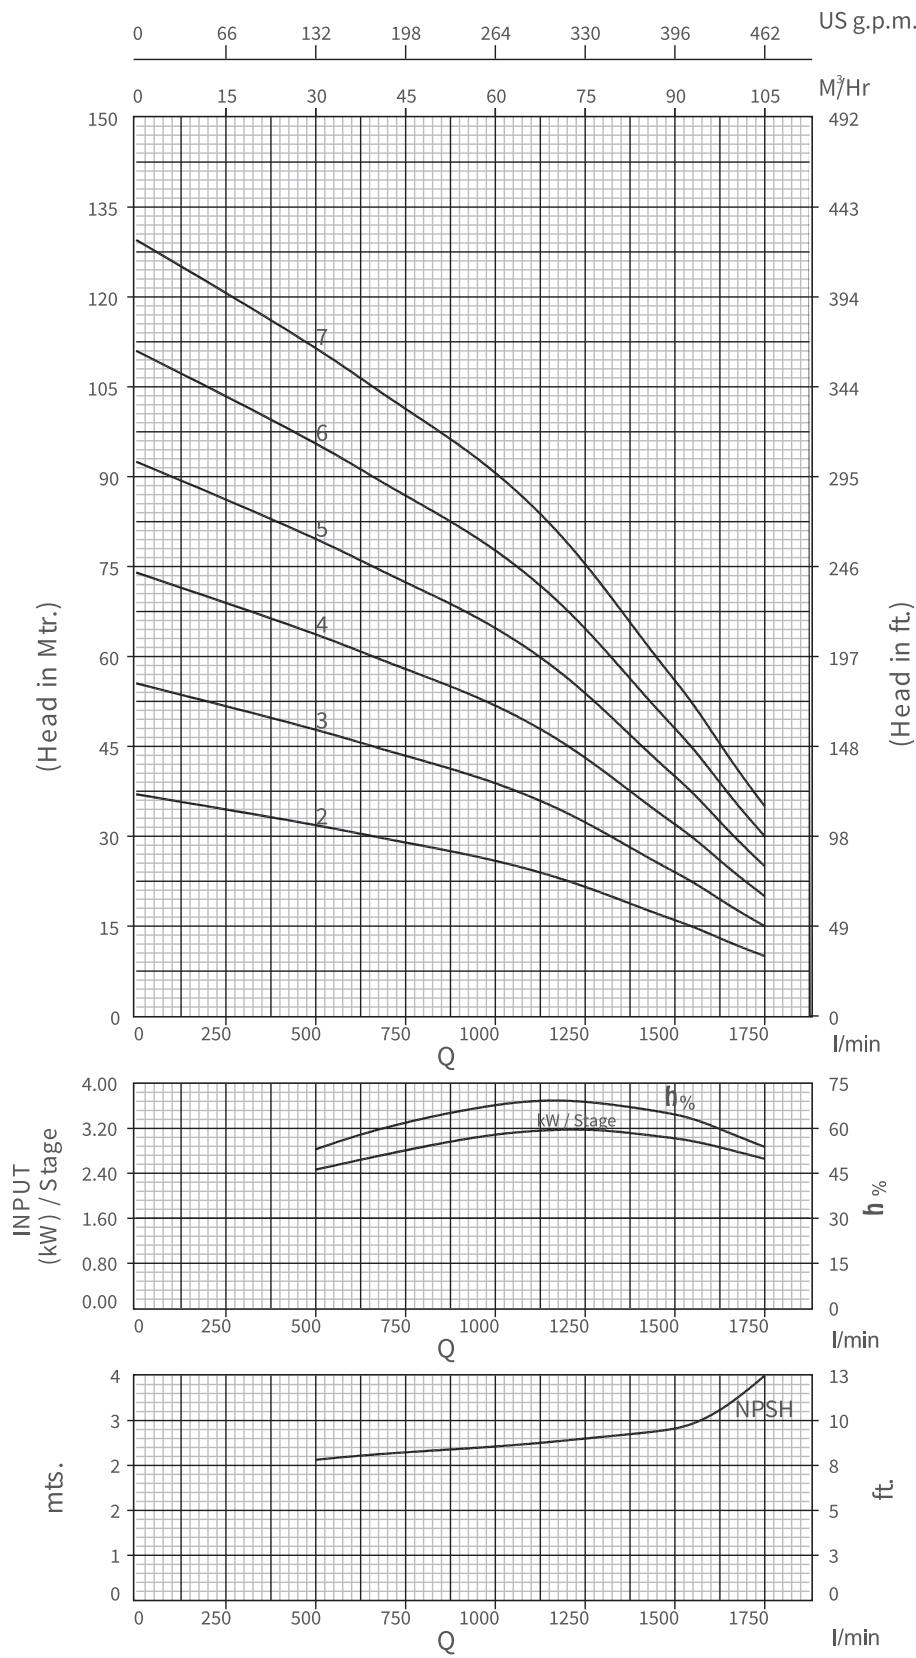


7MF 500, 50Hz
ISO 9906 Annexure A

Performance Chart

Model Name	Three Phase	Stage	Rating			Discharge										
			kW	HP		l/min m ³ /h	0	500	650	930	1130	1280	1450	1550	1660	1750
7MF 500-02		2	7.50	10.00			0	30.0	39.0	55.8	67.8	76.8	87.0	93.0	99.6	105
7MF 500-03		3	11.00	15.00												
7MF 500-04		4	15.00	20.00												
7MF 500-05		5	18.50	25.00												
7MF 500-06		6	22.00	30.00												
7MF 500-07		7	26.00	35.00												

HEAD IN Mtrs.	37	32	30	27	24	21	17	15	12	10
	56	48	45	40	36	32	26	22	18	15
	74	64	60	54	48	42	34	30	24	20
	92	80	75	68	60	52	42	38	30	25
	111	96	90	81	72	63	51	45	36	30
	130	112	105	94	84	74	60	52	42	35

Dimensions & Weights

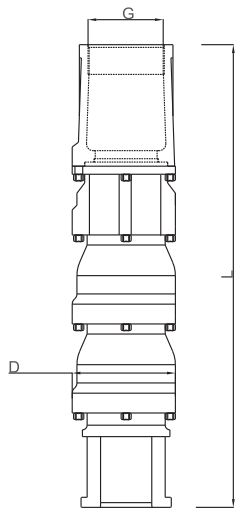


Model name	Specification			
	D	L	Weight (kg)	Weight (incl.pkg kg)
7MF-500A/02	160	686	52	59.5
7MF-500A/03	160	818	63	70.5
7MF-500A/04	160	950	74	81.5
7MF-500A/05	160	1082	84	92.5
7MF-500A/06	160	1214	94	103.5
7MF-500A/07	160	1346	104	114.5

*G:Available Outlet Size 4"
*D:With Cable Guard

7MF 600, 50Hz

ISO 9906 Annexure A

Performance Curves

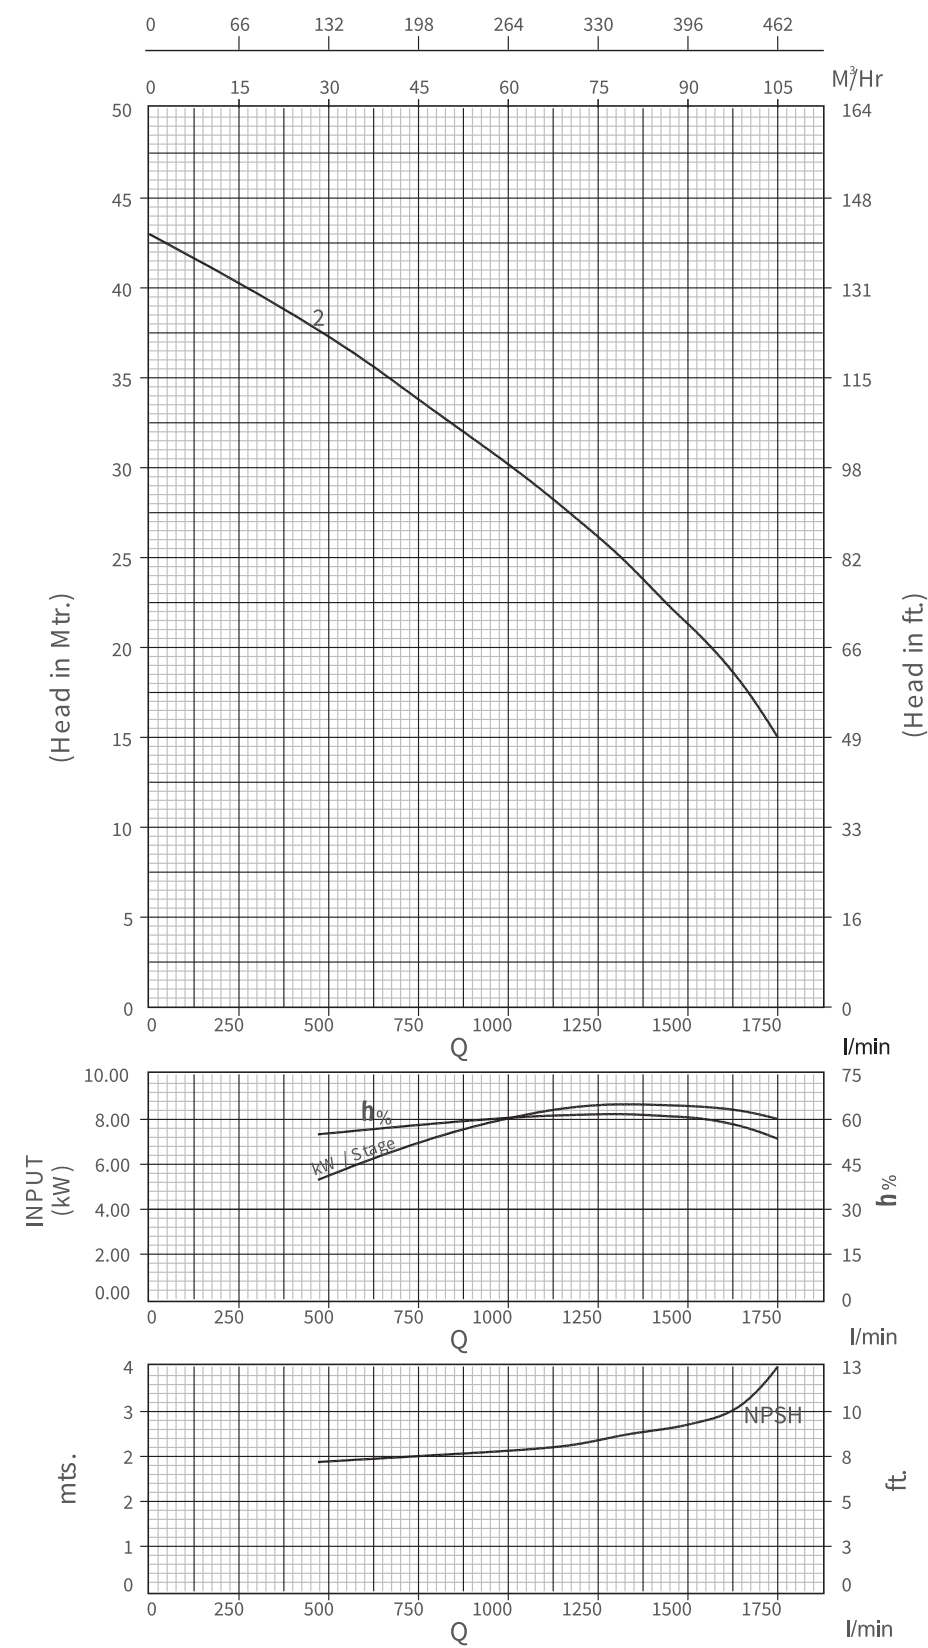

7MF 600, 50Hz


ISO 9906 Annexure A

Performance Chart

Model Name		Rating			Discharge										
		kW	HP		l/min	0	470	730	1020	1200	1320	1460	1520	1660	1750
Three Phase	Stage				m³/h	0	28.2	43.8	61.2	72.0	79.2	87.6	91.2	99.6	105

7MF 600-02	2	9.30	12.50	HEAD m/mtrs.	43	38	34	30	27	25	22	21	18	15
------------	---	------	-------	-----------------	----	----	----	----	----	----	----	----	----	----

Dimensions & Weights

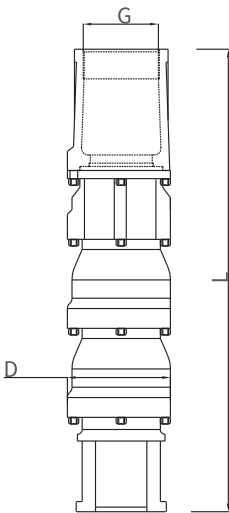


Model name	Specification			
	D	L	Weight (kg)	Weight (incl.pkg kg)
7MF-600A/02	160	686	51.0	59.0

*G:Available Outlet Size 4"
*D:With Cable Guard

7MF 660, 50Hz
ISO 9906 Annexure A

Performance Curves

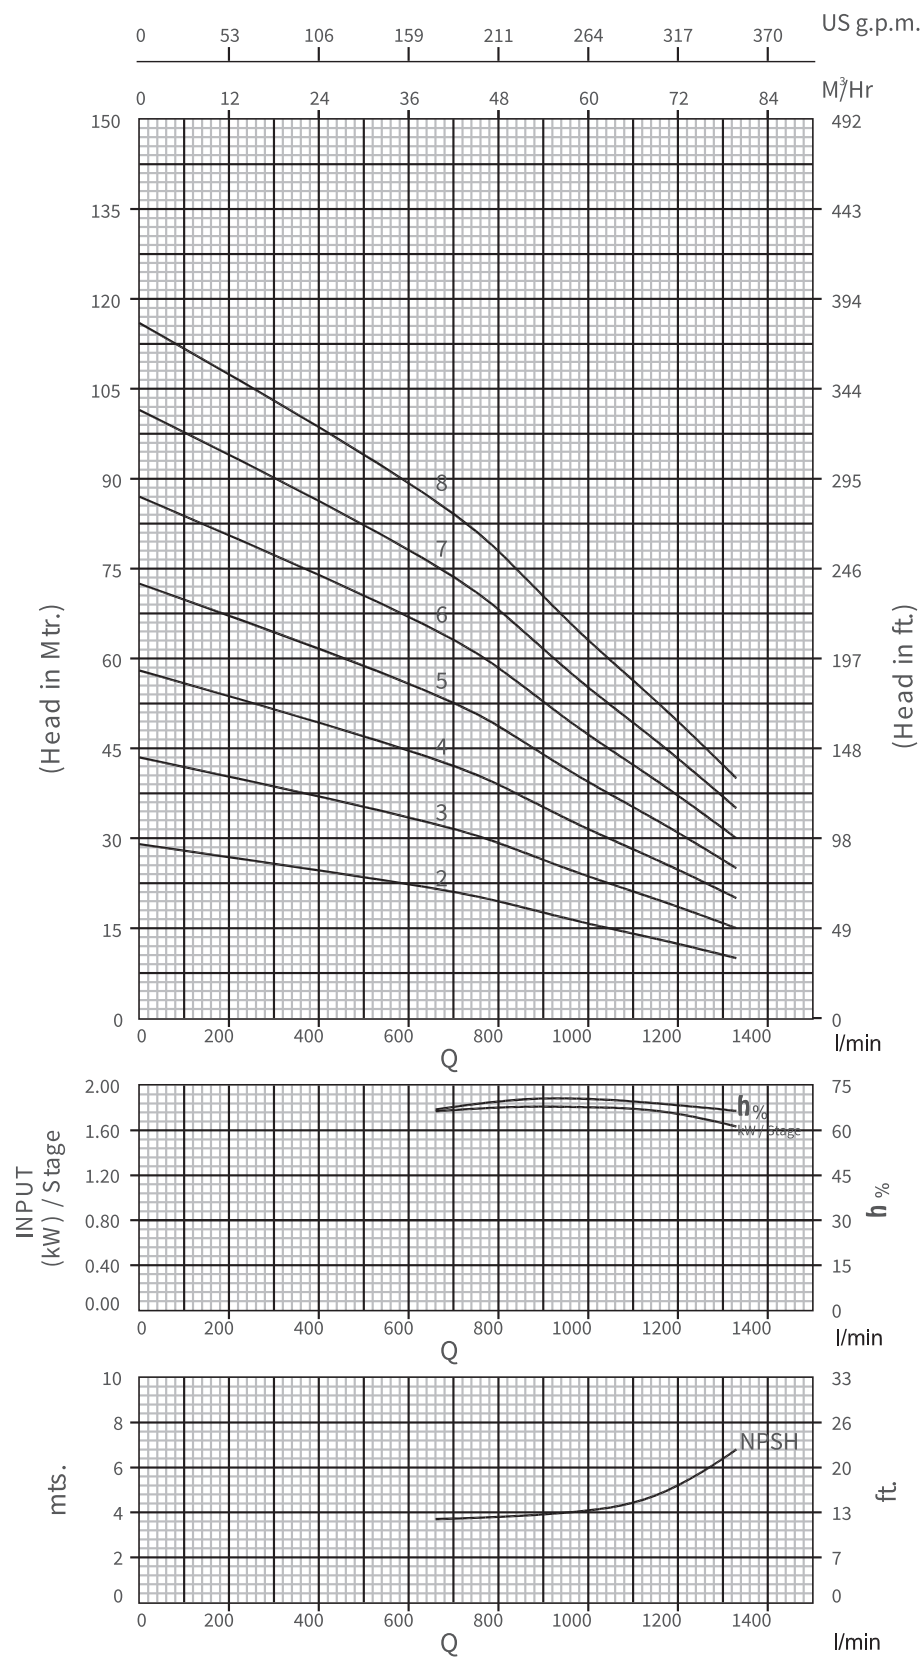


7MF 660, 50Hz
ISO 9906 Annexure A

Performance Chart

Model Name		Rating			Discharge					
Three Phase	Stage	kW	HP	l/min	0	660	830	980	1170	1330
				m ³ /h	0	39.6	49.8	58.8	70.2	79.8

Model Name	Stage	kW	HP	HEAD IN Mtrs.	29	22	19	16	13	10
7MF 660-02	2	4.50	6.00		44	33	28	24	20	15
7MF 660-03	3	5.50	7.50		58	44	38	32	26	20
7MF 660-04	4	7.50	10.00		72	55	48	40	32	25
7MF 660-05	5	9.30	12.50		87	66	57	48	39	30
7MF 660-06	6	11.00	15.00		102	77	66	56	46	35
7MF 660-07	7	13.00	17.50		116	88	76	64	52	40
7MF 660-08	8	15.00	20.00							

Dimensions & Weights

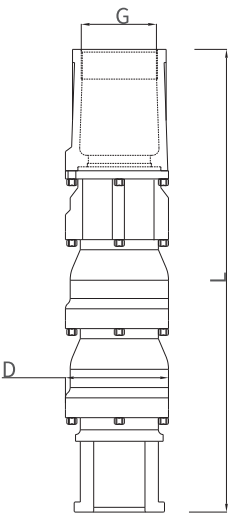


Model name	Specification			
	D	L	Weight (kg)	Weight (incl. pkg kg)
7MF-660/02	160	686	32.5	40.5
7MF-660/03	160	818	40.0	48.0
7MF-660/04	160	950	47.5	55.5
7MF-660/05	160	1082	55.0	63.0
7MF-660/06	160	1214	62.5	70.5
7MF-660/07	160	1346	70.0	78.0
7MF-660/08	160	1478	77.5	85.5

*G:Available Outlet Size 4"
*D:With Cable Guard

7MF 680, 50Hz

ISO 9906 Annexure A

Performance Curves

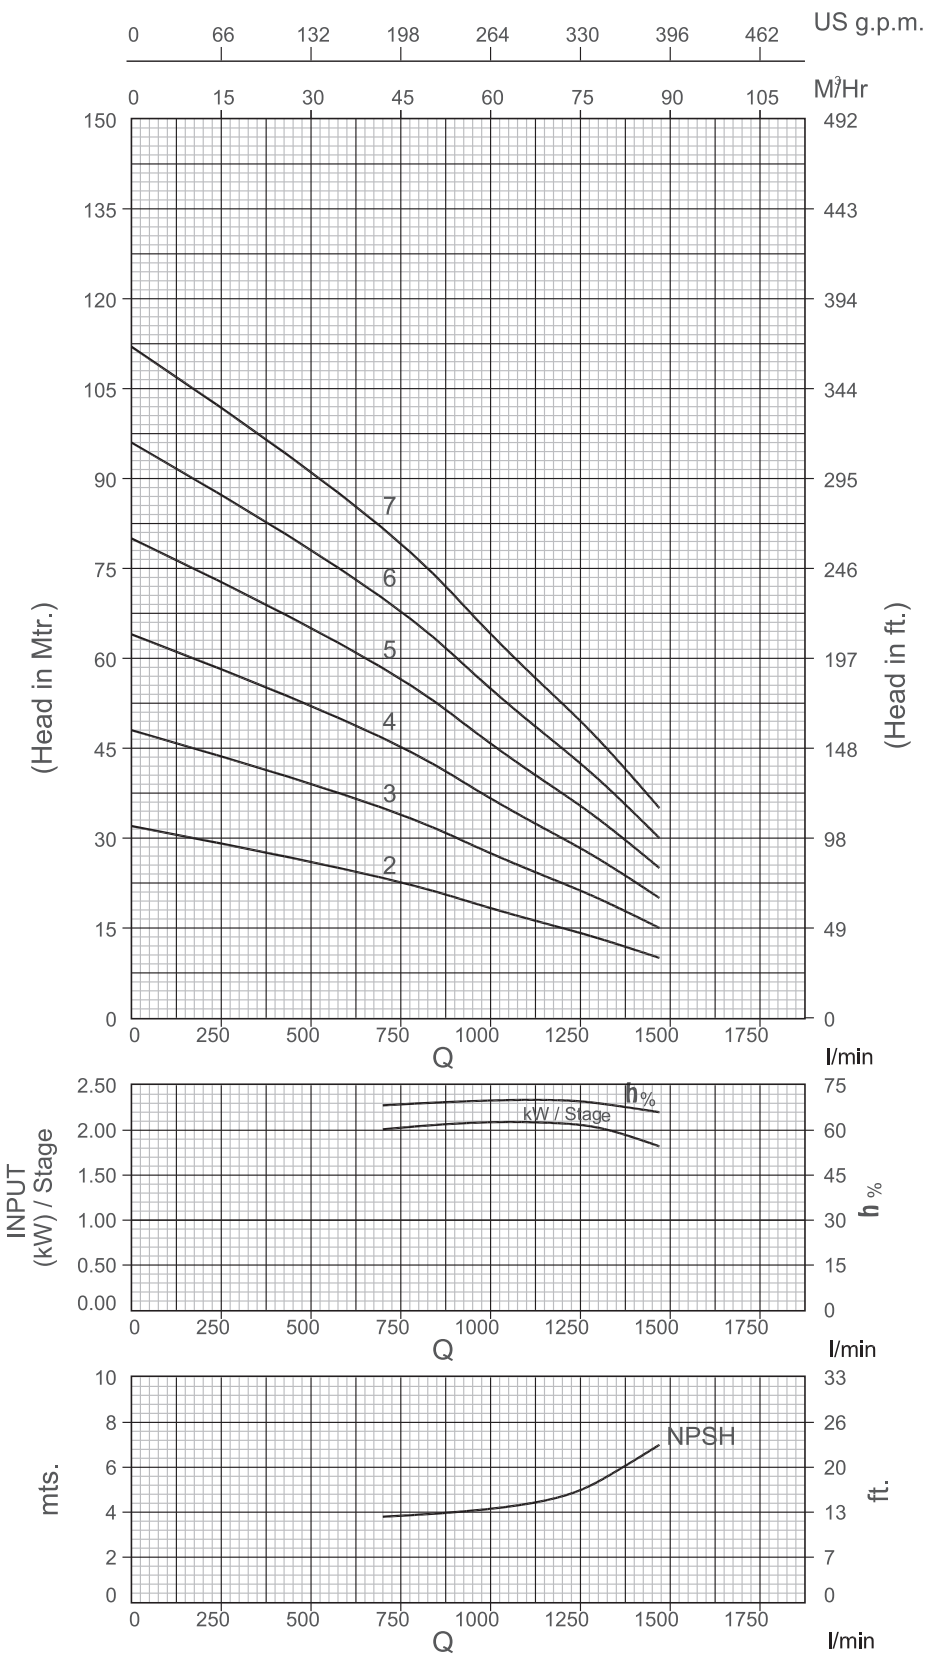

7MF 680, 50Hz


ISO 9906 Annexure A

Performance Chart

Model Name	Stage	Rating			Discharge					
		kW	HP		l/min m ³ /h	0	700	950	1200	1320 1470
Three Phase						0	42.0	57.0	72.0	79.2 88.2

Model Name	Stage	kW	HP	HEAD IN Mtrs.	32	24	19	15	13	10
					48	36	28	22	20	15
7MF 680-02	2	5.50	7.50		64	48	38	30	26	20
7MF 680-03	3	7.50	10.00		80	60	48	38	32	25
7MF 680-04	4	9.30	12.50		96	72	57	45	39	30
7MF 680-05	5	11.00	15.00		112	84	66	52	46	35
7MF 680-06	6	13.00	17.50							
7MF 680-07	7	15.00	20.00							

Dimensions & Weights

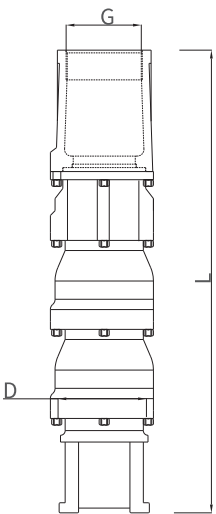

Model name	Specification			
	D	L	Weight (kg)	Weight (incl.pkg kg)
7MF-680/02	160	686	32.5	40.0
7MF-680/03	160	818	40.0	48.5
7MF-680/04	160	950	47.0	55.0
7MF-680/05	160	1082	54.5	62.5
7MF-680/06	160	1214	62.0	70.0
7MF-680/07	160	1346	69.5	77.5

*G:Available Outlet Size 4"
*D:With Cable Guard